

Overview


Chilled display units incorporating a cold well and 2 glass display shelves. The unique Moffat innovative "Polar Air Stream" system provides a constant, recirculating cold air curtain completely enveloping the food displayed. Holding pre-chilled food at a safe, regulated temperature while retaining taste and freshness. Perfect for sandwiches, fruit, yogurts and cold drinks. Self-contained units with accurate, digital control, automatic defrost, high pressure warning and automatic condensate evaporation. The Refrigeration System is housed underneath in a tidy, compact cradle. Utilising a highly efficient, naturally occurring, hermetically sealed, hydrocarbon gas type R290 as standard - reducing carbon footprint and energy consumption.



Features:

- Condensing unit set at 90°. Removes the need for unsightly vents in the front panels of serveries and counters.
- Digital thermostat & temperature controller
- Sliding rear double glazed doors
- Advanced air flow design with unique polar airstream technology
- Controls conveniently positioned in the gantry hood
- Efficient, ozone friendly hydrocarbon refrigeration
- Long life, low energy LED
- Maintaining the core product temperature of pre-chilled food below 5°C in ambient condition not exceeding 25°C and 60% relative humidity
- Automatic condensate water evaporation [no need to empty drip trays]
- Automatic defrost control
- 24 hour operation
- Fully insulated
- Supplied with 2m long power cord and 13amp plug [13A 230v 50Hz]
- Plenum duct to aid onsite ventilation and installation

Cut-Out Dimensions:

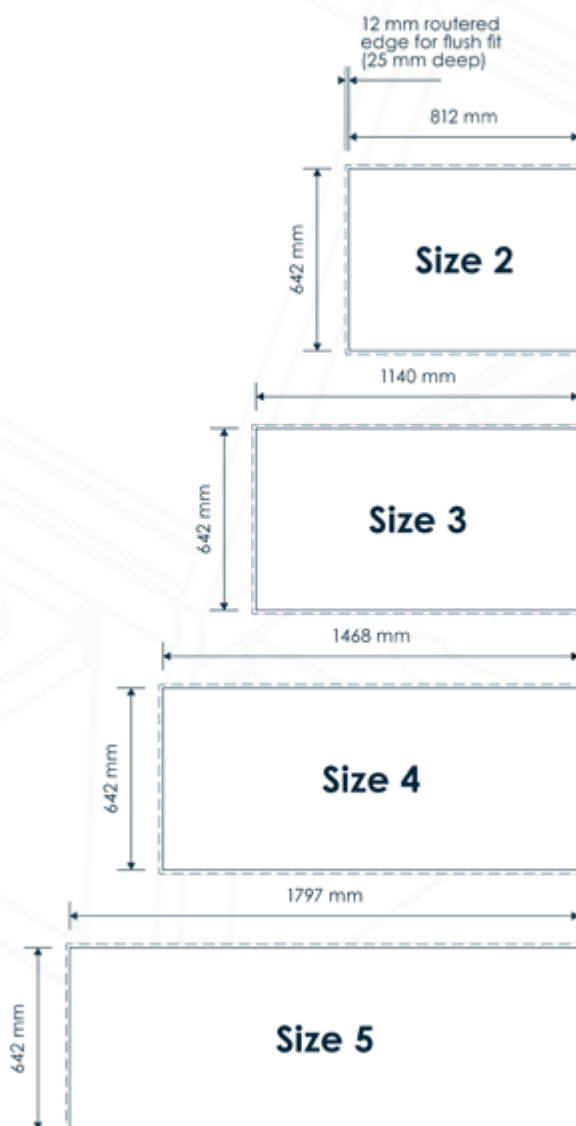

Cleverly engineered Polar Air Stream System provides a constant cold air envelope.

Options:

- Additional air flow kit [In-line fan and flexi duct kit for difficult non-standard installations] (Code: DRAF)
- Front Roller Blind (add "RB" to end of model code)

Code: DRAF



	Model	Weight (kg)	L x W (mm)	Height above display top	No. of Display Shelves	LED Roll Lighting	Electrical Supply	Power Rating (kw)	
1. Curved Glass Open Front	D2RDL	114	830 x 660	540	2	Yes	13amp	1.5	
	D3RDL	134	1158 x 660	540	2	Yes	13amp	1.7	
	D4RDL	151	1486 x 660	540	2	Yes	13amp	1.7	
	D5RDL	171	1814 x 660	540	2	Yes	13amp	1.7	
2. Curved Glass Closed Front	D2RDLF	122	830 x 660	540	2	Yes	13amp	1.5	
	D3RDLF	143	1158 x 660	540	2	Yes	13amp	1.7	
	D4RDLF	161	1486 x 660	540	2	Yes	13amp	1.7	
	D5RDLF	182	1814 x 660	540	2	Yes	13amp	1.7	
3. Curved Glass Front Control (back to wall)	D2RDLC	104	830 x 660	540	2	Yes	13amp	1.5	
	D3RDLC	119	1158 x 660	540	2	Yes	13amp	1.7	
	D4RDLC	131	1486 x 660	540	2	Yes	13amp	1.7	
	D5RDLC	157	1814 x 660	540	2	Yes	13amp	1.7	
4. Square Glass Roller Shutter	D2RDLA	119	830 x 660	645	2	Yes	13amp	1.5	
	D3RDLA	140	1158 x 660	645	2	Yes	13amp	1.7	
	D4RDLA	158	1486 x 660	645	2	Yes	13amp	1.7	
	D5RDLA	179	1814 x 660	645	2	Yes	13amp	1.7	
Roller shutter models with a solid back and front control add "FC" to the code (i.e. D2RDLA would become D2RDLAFC)									
5. Square Glass Open Front	D2RDLS	116	830 x 660	546	2	Yes	13amp	1.5	
	D3RDLS	137	1158 x 660	546	2	Yes	13amp	1.7	
	D4RDLS	155	1486 x 660	546	2	Yes	13amp	1.7	
	D5RDLS	176	1814 x 660	546	2	Yes	13amp	1.7	
6. Square Glass Closed Front	D2RDLSF	124	830 x 660	546	2	Yes	13amp	1.5	
	D3RDLSF	146	1158 x 660	546	2	Yes	13amp	1.7	
	D4RDLSF	165	1486 x 660	546	2	Yes	13amp	1.7	
	D5RDLSF	187	1814 x 660	546	2	Yes	13amp	1.7	
7. Square Glass Front Control (back to wall)	D2RDLSFC	114	830 x 660	546	2	Yes	13amp	1.5	
	D3RDLSFC	131	1158 x 660	546	2	Yes	13amp	1.7	
	D4RDLSFC	145	1486 x 660	546	2	Yes	13amp	1.7	
	D5RDLSFC	162	1814 x 660	546	2	Yes	13amp	1.7	

